


Ultra-Cal IV Caliper







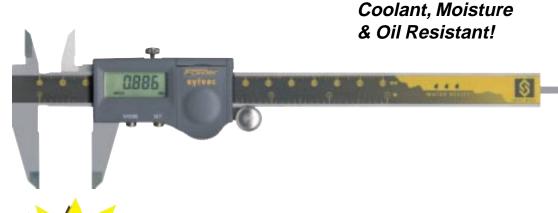

Introducing Fowler/Sylvac's new Electronic Water/Oil Resistent Caliper with Sylvac's patented inductive measuring system.

- 4 way jaws.
- Resolution: .0005"/.01mm.
- Repeatability: .0005"/.01mm.
- Made of hardened stainless steel.
- Large easy to read LCD display
- Direct inch/metric conversion.
- Direct RS232 output.
- Maximum measuring speed of 60"/sec.
- Battery life: 3000 hours continuous.
- Auto-off option.
- Electronics protected to IP54.IEC529.



Jaw Specifications				
Caliper Size	6"	8"	12"	
External Jaw Length	1.5"	1.5"	2.5"	
Internal Jaw Length	.625"	.625"	.750"	
Jaw Thickness	.118"	.118"	.118"	



Order No.	Description	Accuracy	
54-100-444	0—6" Ultra-Cal IV	.001"/.02mm	
54-100-448	0—8" Ultra-Cal IV	.0015"/.03mm	
54-100-412	0—12" Ultra-Cal IV	.0015"/.03mm	
54-115-333	Simplex Connection Kit Includes 80" (2m) 9 pin RS-232 cable;		
	GageWedge software support disk.		
54-100-350	Replacement lithium battery (type #CR2032 or BR2032)		