


Models TESA® CCMA-P


Quick and easy reading – Plastic dial housing.

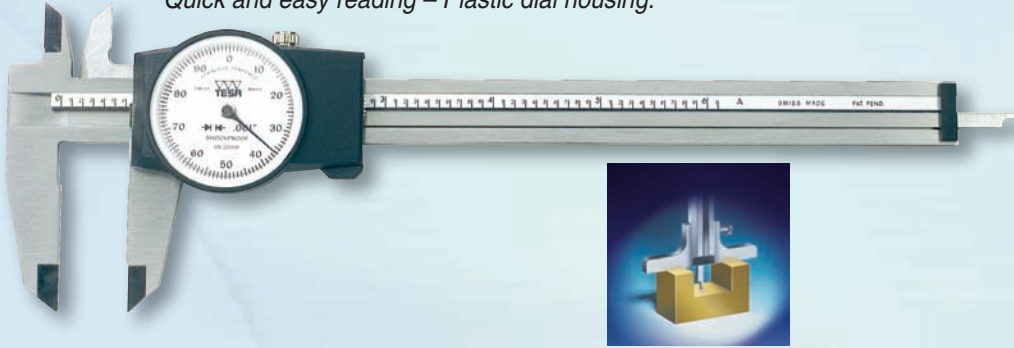

| | | | | |
|-----------------|-------|------------|----------|--------|
| 05.20001 | 42512 | 0 - 6 in | 0.001 in | 0.1 in |
| 05.10004 | 42508 | 0 - 150 mm | 0.02 mm | 2 mm |





Optional Accessory

| | | |
|-----------------|-------|-----------------------|
| 05.60013 | 42534 | Depth measuring foot. |
|-----------------|-------|-----------------------|

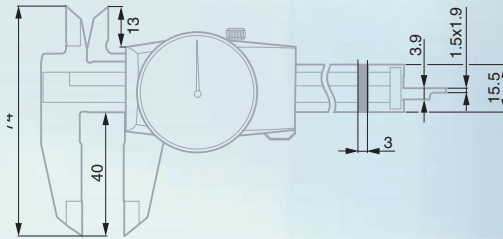

Models ETALON® 125


Slider with metal dial housing – 1 mm per pointer revolution.

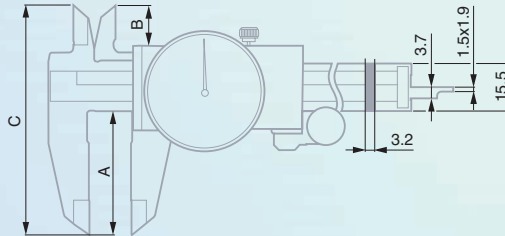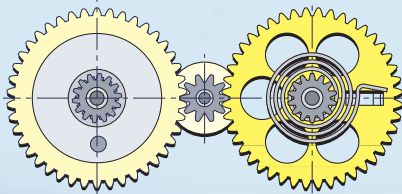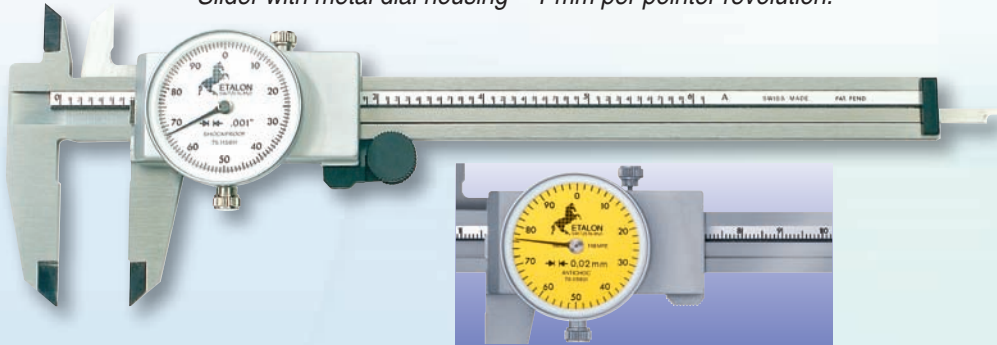

| | | | | | |
|------------------|-------|------------|----------|--------|--|
| 75.115811 | 86148 | 0 - 6 in | 0.001 in | 0.1 in | with wheel drive |
| 75.116550 | 26316 | 0 - 6 in | 0.001 in | 0.1 in | with wheel drive, black face and white scale numbering |
| 75.115821 | 41739 | 0 - 150 mm | 0.02 mm | 1 mm | without wheel drive |

Optional Accessory


| | | |
|-----------------|-------|-----------------------|
| 05.60013 | 42534 | Depth measuring foot. |
|-----------------|-------|-----------------------|



≤.001 in / 100 mm:
20 μm >.001 in /
100 mm: 30 μm




1.25 in
diameter rotating dial
with lock



≤.001 in / 100 mm:
20 μm >.001 in /
100 mm: 30 μm



1.25 in
diameter rotating dial
with lock



Automation and Metrology, Inc.
130 Liberty Street
Painesville, Ohio 44077

PH 440-354-6436
FX 440-639-9983

