


Fowler

Ultra-Point Aluminum Caliper

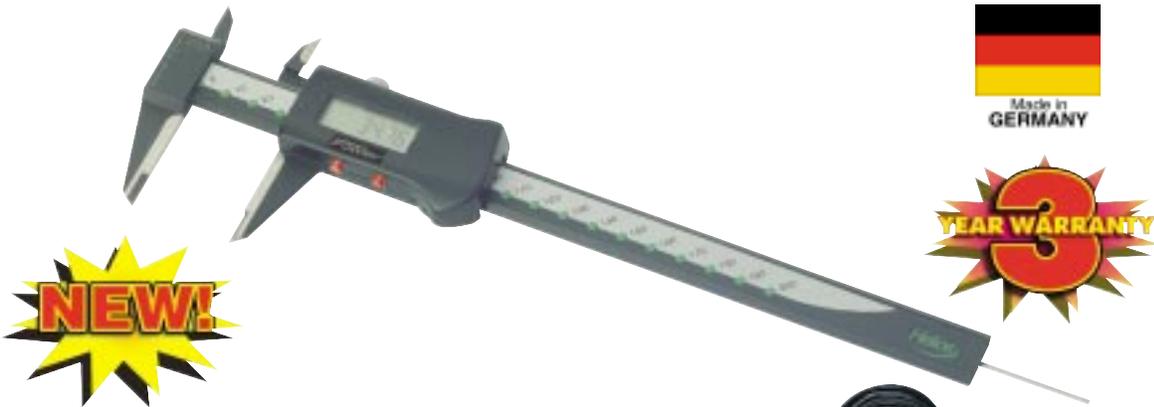

Fowler/Helios is proud to introduce a new lightweight, high precision caliper at almost half the weight of steel calipers. This is made possible by a special aluminum rail and slide. The aluminum body of the Helio-Point has a hard-anodized surface to give it a hardness of 1100HV

Specifications:

- 6 & 8" models offer 4-way measurement—depth, inside, outside and step. Depth rod has a diameter of .063"/1.6mm
- 12" model offers inside, outside, and step measurements.
- Resolution .0005"(.01mm)
- Repeatability .0005"(.01mm) ±2s
- Measuring surface hardness = 60HRC

Electronic Specifications:

- Incremental floating zero.
- Direct inch/metric conversion.
- Large, high contrast LCD display indicates in/mm, hold, and zero functions.
- Direct RS-232C output
- Combination zero/data/hold button.



Special sliding material and V-guide assures precise, smooth movement with absolutely no play



| Jaw Specifications | | 6" | 8" | 12" |
|---------------------|--|-------|-------|-------|
| Caliper Size | | 6" | 8" | 12" |
| External Jaw Length | | 1.6" | 1.6" | 2.4" |
| Internal Jaw Length | | .625" | .625" | .625" |
| Jaw Thickness | | .118" | .118" | .118" |



| Order No. | Description |
|------------|---|
| 54-108-006 | 0—6" (0—150mm) Ultra-Point Caliper |
| 54-108-008 | 0—8" (0—200mm) Ultra-Point Caliper |
| 54-108-012 | 0—12" (0—300mm) Ultra-Point Caliper |
| 54-115-333 | Simplex Connection Kit. Includes 80" (2m) 9 pin cable; GageWedge software support disk. |
| 54-100-350 | Replacement Lithium Battery CR2032/BR2032 |