


Special Features

- Revolution counter hand. Supplied with lug backs positioned through 90° increments.
- Spindle rack & contact points of hardened stainless steel for long wear; cases forged brass, satin-chromed; gear wheels hard brass.
- Pinions of silver steel, hardened tempered and burnished on pivots; lapped on teeth.
- Microfine graduations in black for continuous readings and red for balanced readings.
- Available in metric graduations.
- Movement mounted independently from case on rigid supporting plate, ensuring perfect and permanent alignment.
- Extra long springs for uniform pressure through entire travel of spindle.
- Bezel knurled; easily adjusted thru 360°.



- Meets AGD specifications. Group II & III gages—measuring pressure approximately 2 oz. except .0001" (.002mm) which is 5 oz.
- Includes adjustable tolerance limit markers.
- Price includes fitted carton box.

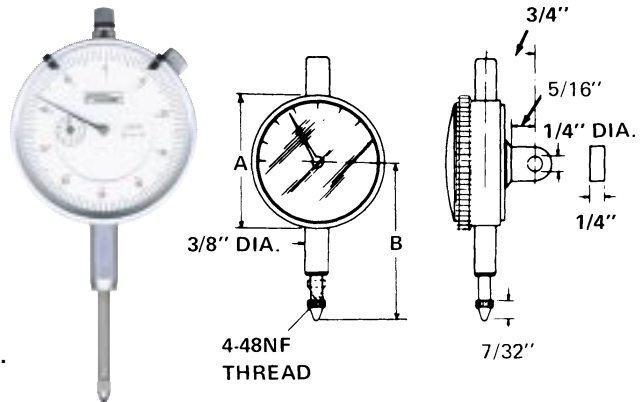

Order No.	AGD Group	Grad.	Range	Continuous Reading	Balanced Reading	Dim. A	Dim. B
Inch Series:							
52-520-005	I	.001"	.250"	0—100	—	1 ⁵ / ₈ "	2 ¹ / ₈ "
52-520-010	I	.001"	.250"	—	0—50—0	1 ⁵ / ₈ "	2 ¹ / ₈ "
52-520-100	II	.001"	.250"	0—100	0—50—0	2 ¹ / ₄ "	2 ⁷ / ₃₂ "
52-520-102	II	.001"	.250"	—	0—50—0	2 ¹ / ₄ "	2 ⁷ / ₃₂ "
52-520-105	II	.001"	.500"	0—100	0—50—0	2 ¹ / ₄ "	2 ¹ / ₂ "
52-520-106	II	.0005"	.500"	0—50	0—25—0	2 ¹ / ₄ "	2 ⁷ / ₈ "
52-520-107	II	.001"	.500"	—	0—50—0	2 ¹ / ₄ "	2 ¹ / ₂ "
52-520-109	II	.001"	1.00"	0—100	0—50—0	2 ¹ / ₄ "	3 ³ / ₈ "
52-520-110	II	.001"	1.00"	0—100	—	2 ¹ / ₄ "	3"
52-520-115	II	.001"	1.00"	—	0—50—0	2 ¹ / ₄ "	3"
52-520-120	II	.001"	2.00"	0—100	0—50—0	2 ¹ / ₄ "	5 ¹ / ₂ "
52-520-125	II	.0005"	.250"	0—50	0—25—0	2 ¹ / ₄ "	2 ⁷ / ₃₂ "
52-520-127	II	.0005"	.250"	—	0—25—0	2 ¹ / ₄ "	2 ⁷ / ₃₂ "
52-520-128	II	.0005"	1.00"	0—50	—	2 ¹ / ₄ "	3"
52-520-129	II	.0005"	1.00"	0—50	0—25—0	2 ¹ / ₄ "	3 ³ / ₈ "
52-520-135	II	.0001"	.05"	0—10	0—5—0	2 ¹ / ₄ "	2 ¹ / ₃₂ "
52-520-137	II	.0001"	.05"	—	0—5—0	2 ¹ / ₄ "	2 ¹ / ₃₂ "
52-520-140	II	.0001"	.500"	0—10	—	2 ¹ / ₄ "	2 ¹ / ₂ "
52-520-200	III	.001"	.500"	0—100	0—50—0	3 ¹ / ₄ "	2 ¹ / ₂ "
52-520-205	III	.0005"	1.00"	0—50	0—25—0	3 ¹ / ₄ "	3"
52-520-210	III	.001"	2.00"	0—100	0—50—0	3 ¹ / ₄ "	5 ¹ / ₃₂ "
52-520-215	III	.0005"	.125"	0—50	0—25—0	3 ¹ / ₄ "	2 ⁷ / ₃₂ "
Metric Series:							
52-520-300	II	.01mm	10mm	0—100	0—50—0	2 ¹ / ₄ "	2 ¹ / ₂ "
52-520-400	II	.002mm	5mm	—	0—10—0	2 ¹ / ₄ "	2 ⁷ / ₃₂ "
52-520-500	II	.01mm	25mm	0—100	0—50—0	2 ¹ / ₄ "	3"
Inch/Metric series				Inch	Metric		
52-530-110	II	.001"	1."/25mm	0—100	0—100—0	2 ¹ / ₄ "	3 ³ / ₈ "